Small Air

Sullivan Palatek®

"The Ultimate Performance Rotary Screw Air Compressor"



Dedicated to Quality & Committed to Support.

Sullivan Palatek®



The Sullivan-Palatek Compressor

The advantages of owning a Sullivan-Palatek Rotary Screw Air Compressor.

Sullivan-Palatek provides low maintenance, high performance and one of the most reliable air ends in the industry.

Our design features advanced profile rotary screws for high efficiency.

Operating costs are significantly reduced because compressors can be sized to desired operating conditions.



"Dedicated to Quality



KEEP IT SIMPLE ...
KEEP IT CLEAN ...

MAKE IT SOLID ...

MAKE IT SULLIVAN!

Sullivan-Palatek manufactured air end. insures complete control over quality and testing of all components. Tapered roller bearings add to the quality of every Sullivan machine.



Sullivan-Palatek provides a THREE YEAR, Unlimited Hour, Air End Warranty, on all machines.



Sullivan-Palatek Portable Features:

Galvaneal Enclosure, protection against chipping and rust. Complete instrument panel.

Glow plug engine provides easy starting in all climates.

Galvanized wheel wells and tool boxes. Heavy duty tires. Pintle eye standard, or optional two inch ball.

Safety chains standard on all models.

Committed to Support"



Standard Panel



Optional Panel

Deluxe Curbside Instrument Panel

Standard: The standard panel includes alternator indicator, hour meter, fuse, fuel level gauge, discharge pressure gauge, engine water and oil temperature gauges unloading valve, bypass switch, ignition switch.

Optional Panel: The optional panel consists of standard panel plus air oil separator indicator, tachometer, air filter indicator, fuel solenoid circuit breaker and starter breaker switches, discharge air temperature, voltmeter gauge, and ether starting.



Manual Holder (optional)
Equipped with Operating Manual
Holder





Heavy Duty Drawbar

The Drawbar on all our portable compressors are made of strong tubular steel. Ease of backing up. Adjustable 3" pintle, or 2" ball hitch. Adjustable, swivel screwjack. Standard safety chains.



Quality Built

Reliability, Low Operating Cost & Longevity.

Rear panel door opens for external cleaning of coolers. Side by side coolers.


Two-stage, dry type separate filtration for engine and compressor. Easily serviced from the outside.

Thirty gallon fuel tank, steel belted radial tires with 15 inch wheels for stability and ease of towing.



STANDARD PERFORMANCE MODELS

Quality Portable Air

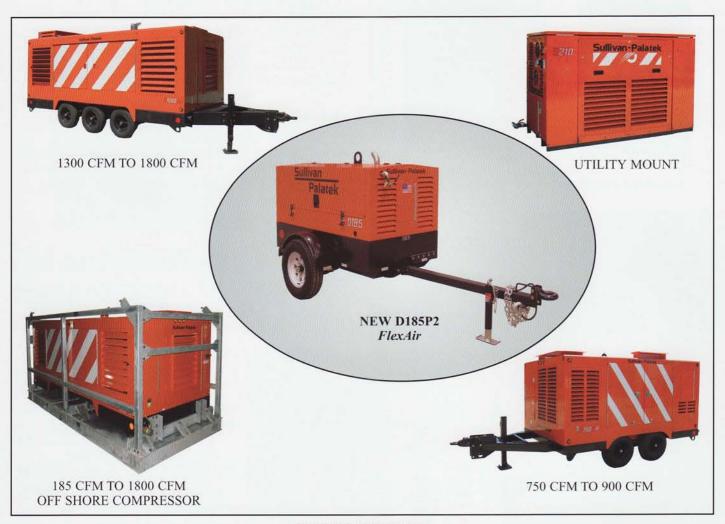

SPECIFICATIONS

MODEL	PSI	CFM	ENGINE MANUFACTURER	ENGINE HORSEPOWER	LENGTH (inches)	HEIGHT (inches)	WIDTH (inches)	WEIGHT (pounds)
D185P	80-125	185	JOHN DEERE	49	138.25	63.5	55	2370
0185P2JD	100	185	JOHN DEERE	49	121.81	60.39	55	1900
D185P2CA	100	185	CATERPILLAR	49	121.81	60.39	55	1900
D210PH	150	210	JOHN DEERE	80	138.25	63.5	55	2600

Sold and Serviced By:



